
INTERMOT - ADVANCED - MOTORS

IAM SERIES

H2 MODEL

***IAM 200-250-300-350
400-500-600 H2***

IAM 190/C H2

IAM 300/C H2

IAM 200/B10 H2

***IAM 200-250-300-350
400-500-600/PH H2***

***IAM 200-250-300-350
400-500-600/GM2 H2***

***IAM 200-250-300-350
400-500-600/S H2***

INDEX

TECHNICAL DATA - - - - -	Pag.	28
IAM H2 200-250-300-350 - - - - -	"	29
IAM H2 400-500-600 - - - - -	"	30
IAM H2 190/C - - - - -	"	31
IAM H2 300/C - - - - -	"	32
IAM H2 200/B10 - - - - -	"	33
IAM H2 200-250-300-350-400-500-600/PH - - - - -	"	34
IAM H2 200-250-300-350-400-500-600/GM2 - - - - -	"	35
IAM H2 200-250-300-350-400-500-600/S - - - - -	"	36
ORDERING INSTRUCTIONS - - - - -	"	37
GRAPHIC PERFORMANCES H2 200-250-300-350 - - - - -	"	38
GRAPHIC PERFORMANCES H2 400-500-600 - - - - -	"	39

TECHNICAL DATA

H2

MODEL		IAM 200 H2	IAM 250 H2	IAM 300 H2	IAM 350 H2	IAM 400 H2	IAM 500 H2	IAM 600 H2
Displacement	cc/rev	198	253	314	362	424	492	584
Specific Torque	Nm/bar	3.2	4.0	5.0	5.8	6.7	7.8	9.3
Max cont. Pressure	bar	250	250	250	250	250	250	250
Max int. Pressure	bar	300	300	300	300	300	300	300
Peak pressure	bar	350	350	350	350	350	350	350
Max continuous speed	rpm	800	750	750	650	600	500	500
Peak speed	rpm	900	850	850	750	700	600	600
Max continuous power	HP	45	45	45	45	45	45	45
	kW	33	33	33	33	33	33	33
Max power	HP	66	66	66	66	66	66	66
	kW	49	49	49	49	49	49	49

- N° of pistons: 5
- Max case pressure: 6 bar
- Max back pressure: 70 bar
- Dry weight: 42 kg
- Temperature range: -30°C ÷ +70°C
- Minimum speed: 2 rpm


- Flushing flow^(*):

IAM H2 200 – 250 – 300	6 l/min
IAM H2 350 – 400 – 500	8 l/min
IAM H2 600	10 l/min

(*)for further details regarding flushing go to page 10 of this catalogue.

SIZE


IAM 200-250-300-350 H2

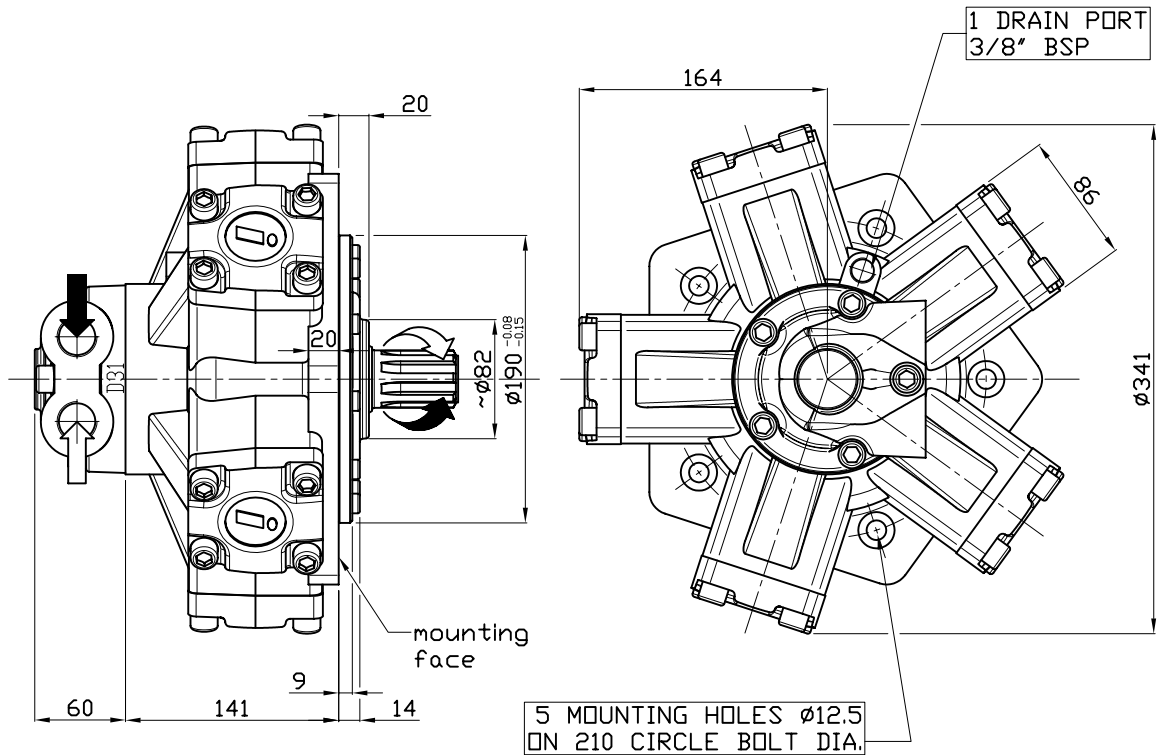


SHAFT

IAM 200-250-300-350 H2

A0: Standard splined shaft

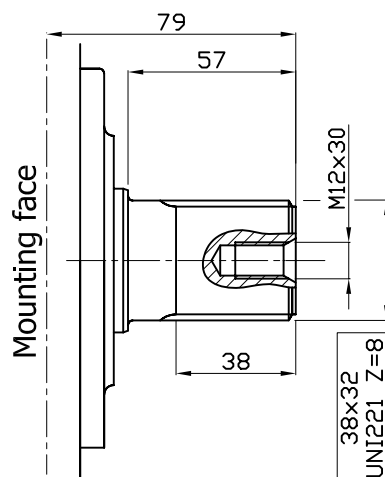


A2: Parallel shaft on request

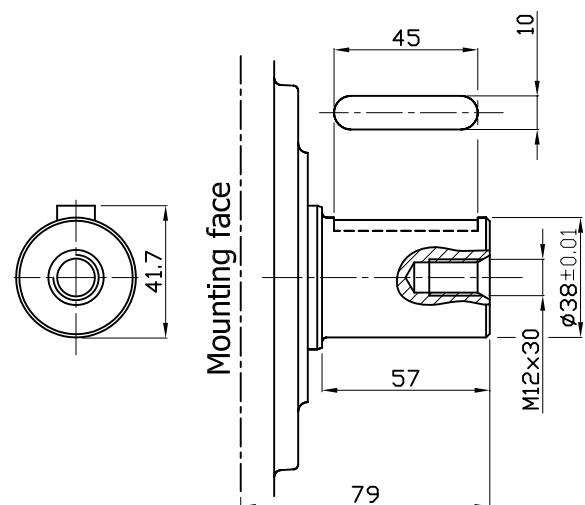

ONLY FOR IAM 300 H2: FEMALE SHAFT AVAILABLE UPON REQUEST 40x3x12x9H DIN 5480

SIZE


IAM 400-500-600 H2

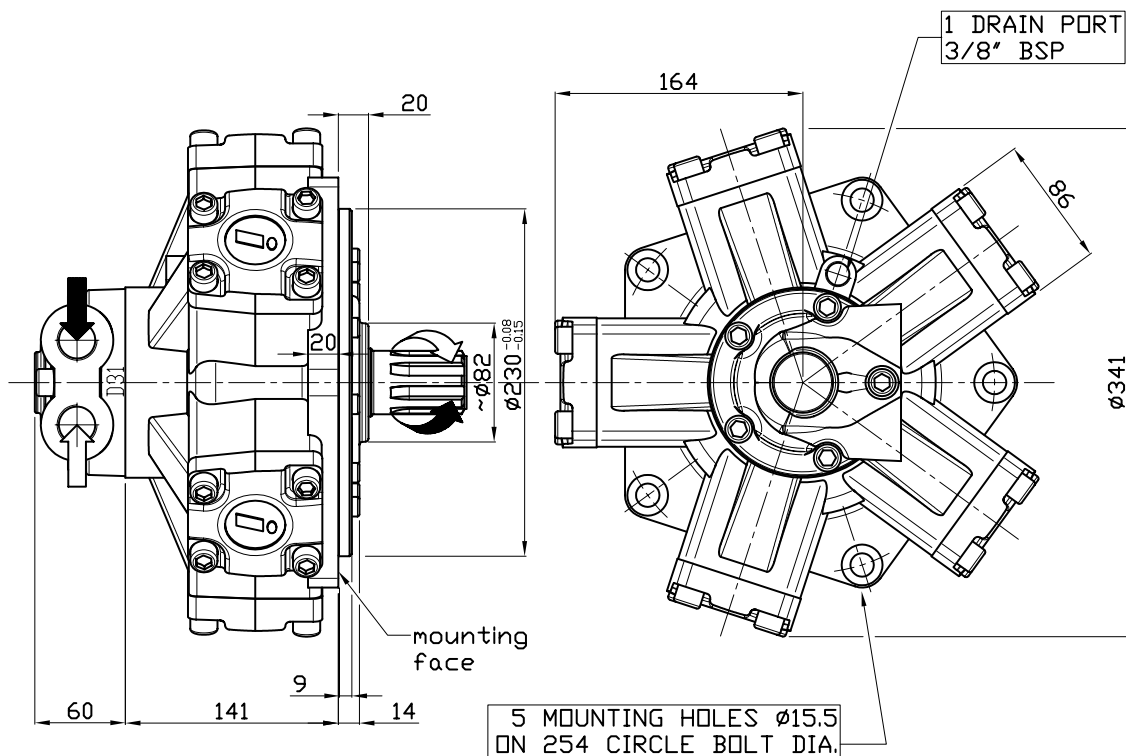


SHAFT

IAM 400-500-600 H2

A0: Standard splined shaft

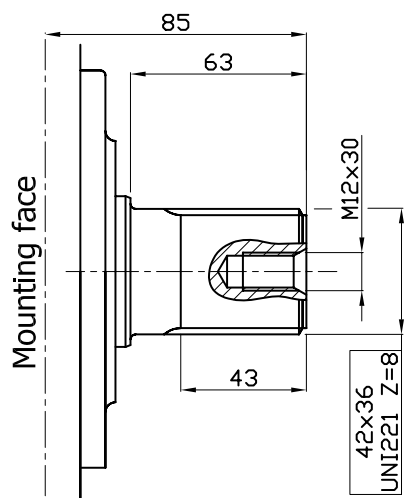


A2: Parallel shaft on request

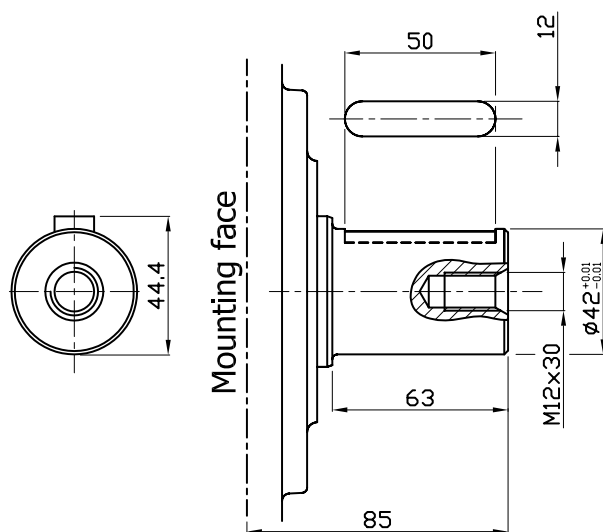

SIZE

IAM 190/C H2


Displacement:
198 cc/rev

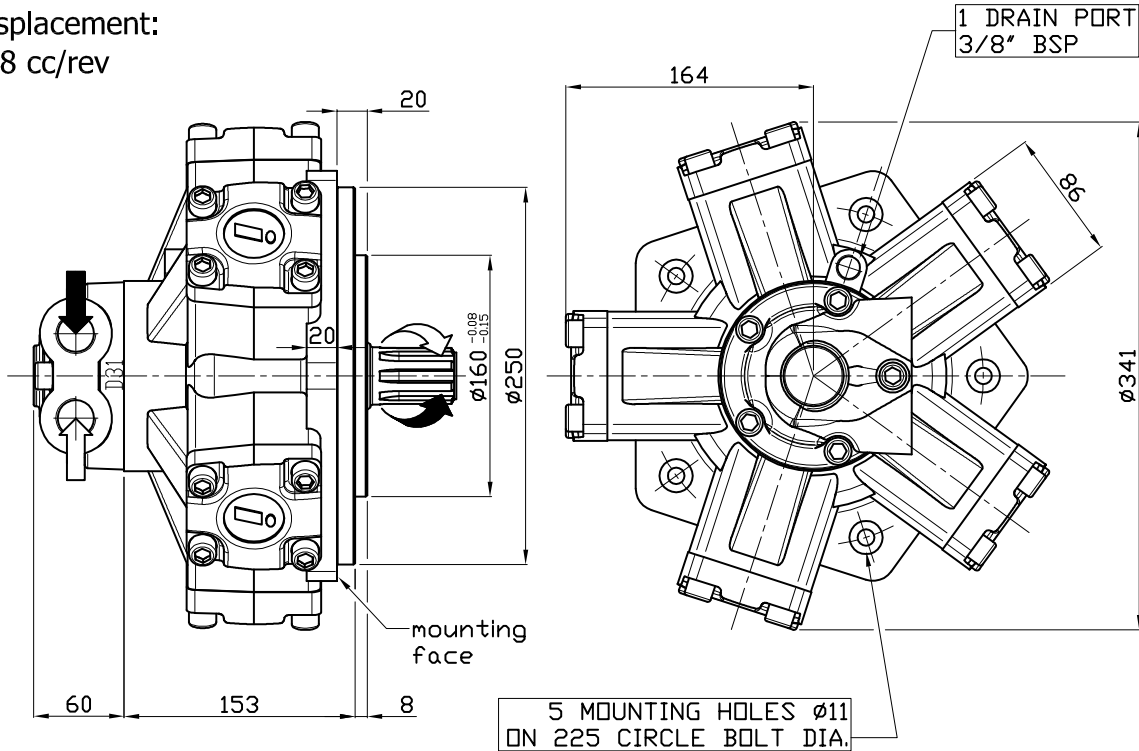


SHAFT & OPTION

IAM 190/C H2

A0: Standard splined shaft

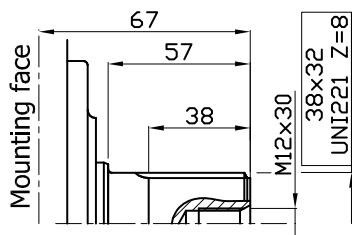


A2: Parallel shaft on request

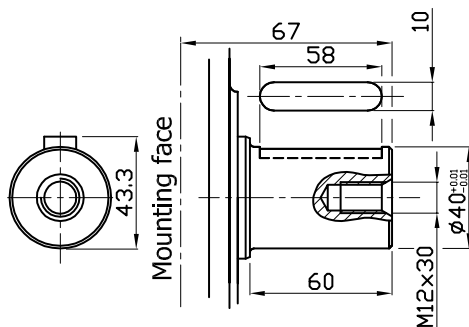

FL1: connection block

Connection block, fitting D47 distributor, for motor MR 160/190/250/300

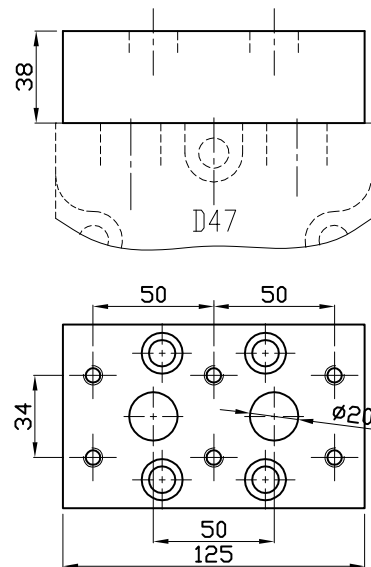

SIZE

IAM 300/C H2


(available displacements:

253 cc/Rev

289 cc/Rev

339 cc/Rev


393 cc/Rev)

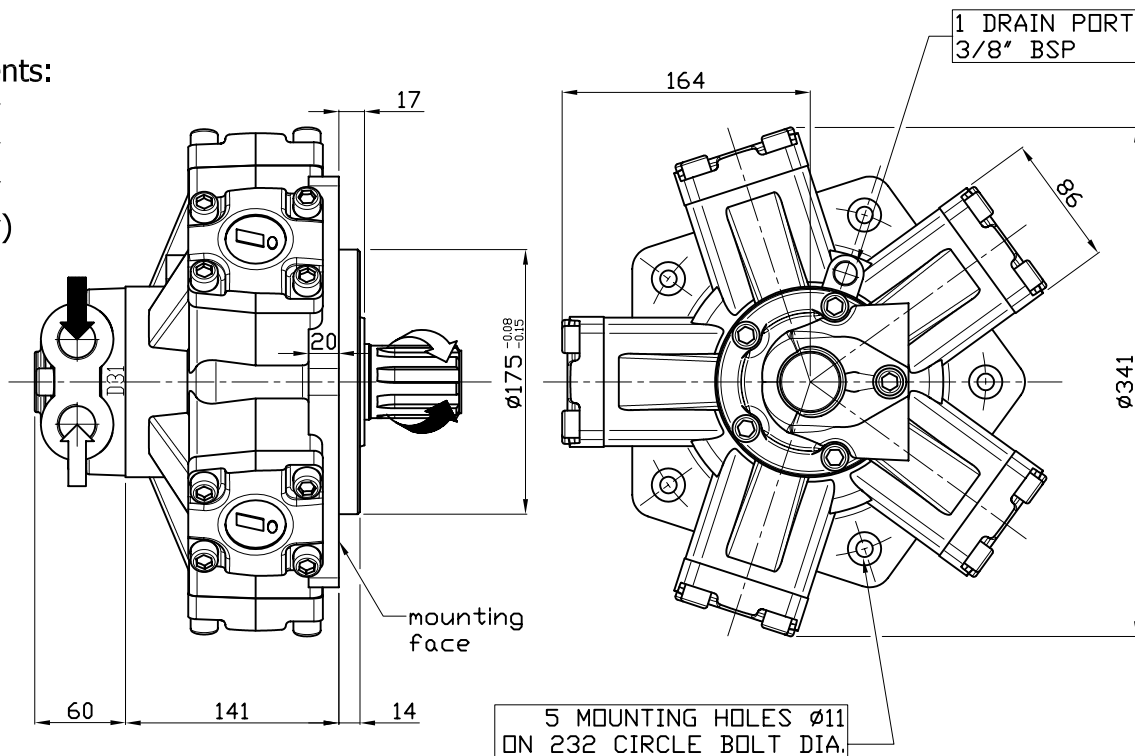

SHAFT & OPTION


IAM 300/C H2

A0: Standard splined shaft

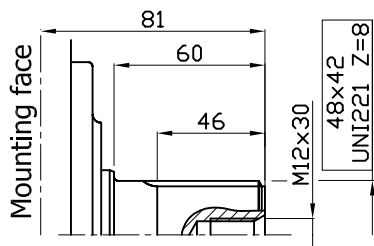


A2: Parallel shaft on request

(not available for 253 cc/Rev displacement)

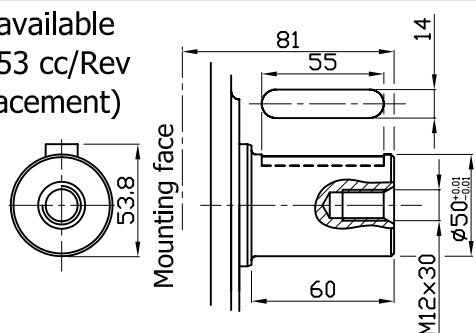


FL1: connection block

Connection block, fitting D47 distributor, for motor MR 160/190/250/300

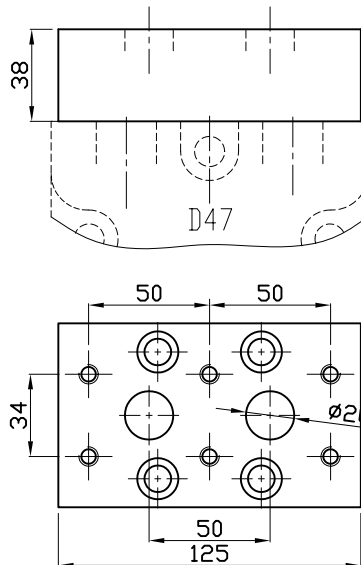

SIZE


IAM 200/B10 H2

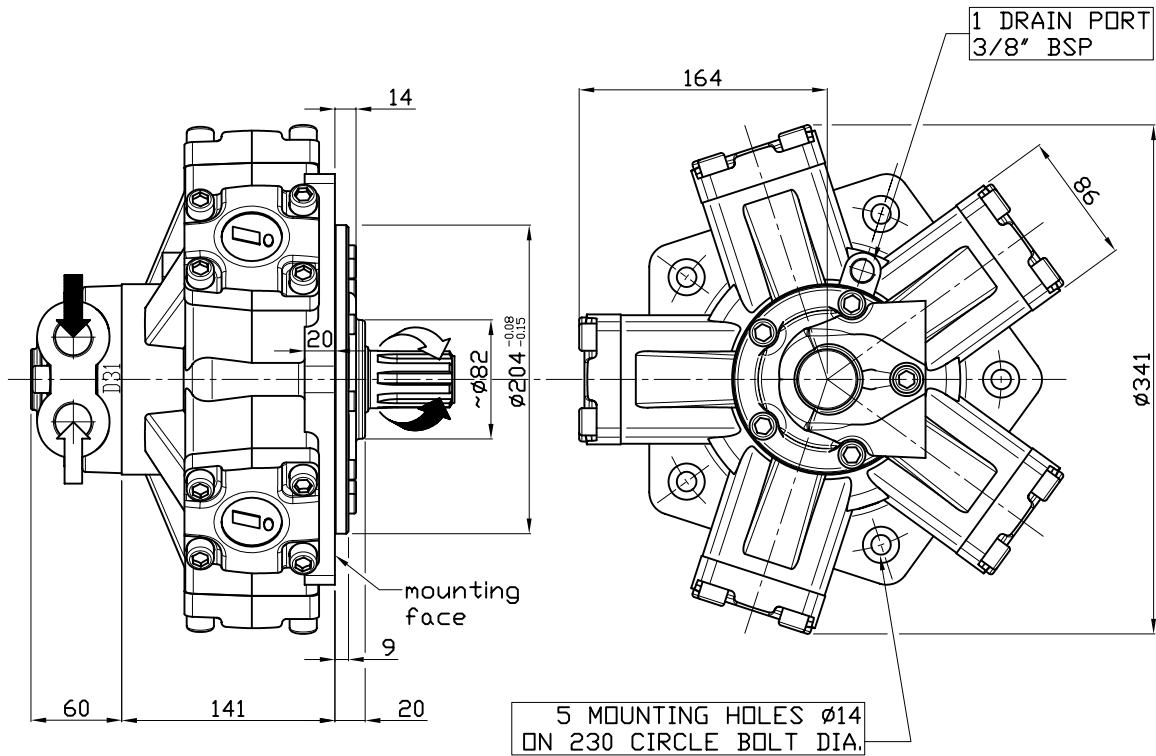


SHAFT

IAM 200/B10 H2


A0: Standard splined shaft

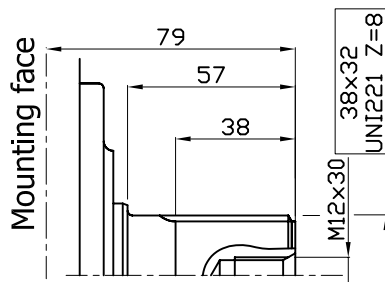

A1: Splined shaft on request

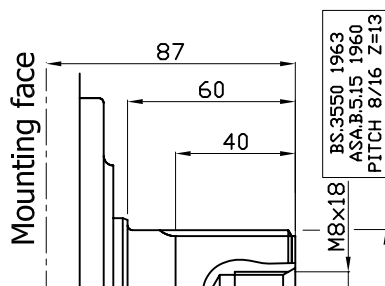


A2: Parallel shaft on request

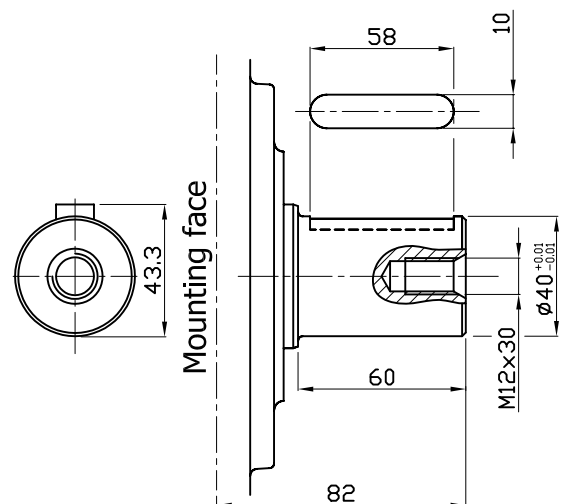

INTERCHANGEABLE WITH GM2

SIZE


IAM 200/GM2 250/GM2 300/GM2 350/GM2 400/GM2 500/GM2 600/GM2 H2

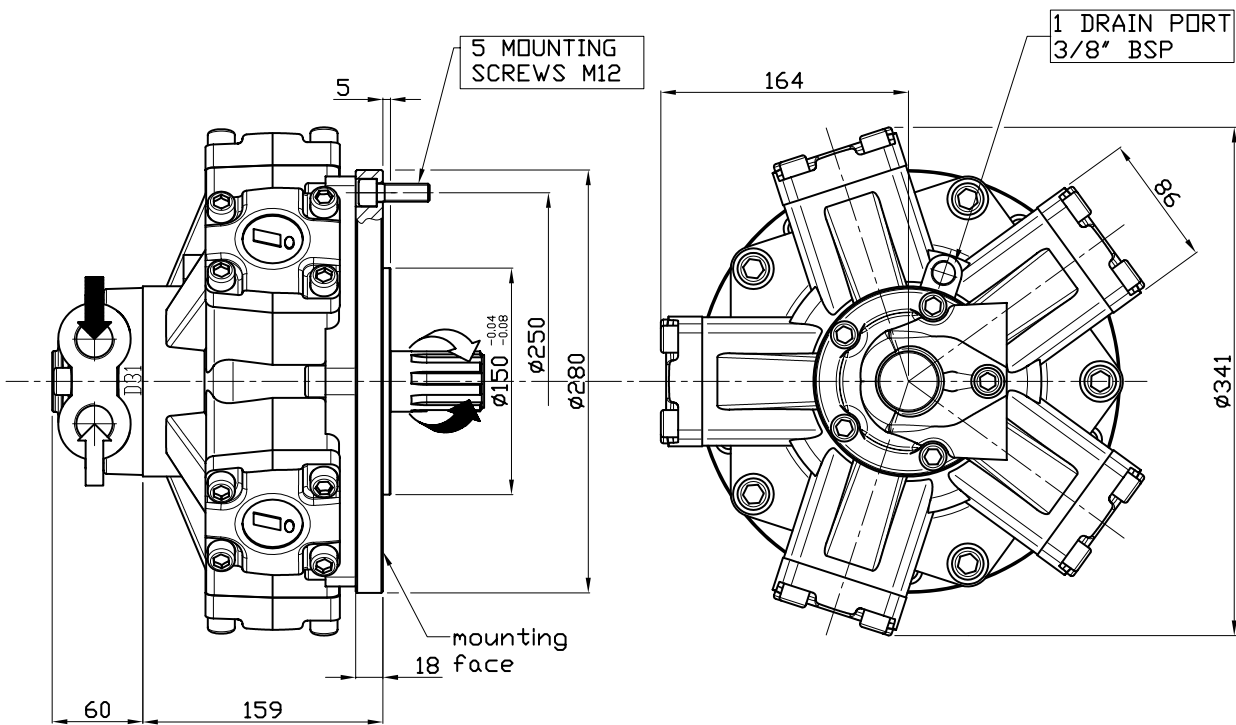


SHAFT

IAM 200/GM2 250/GM2 300/GM2 350/GM2 400/GM2 500/GM2 600/GM2 H2


A0: Standard splined shaft

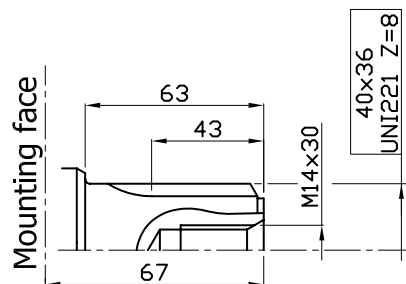

A2: Parallel shaft on request

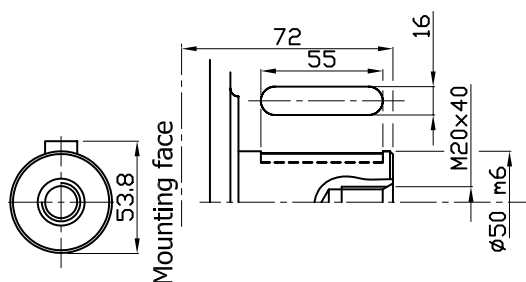


A3: Female shaft on request

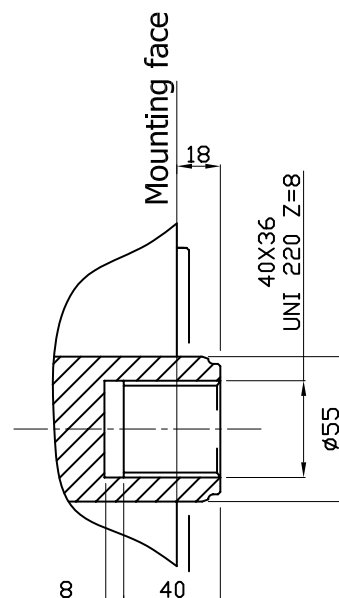

MTCP SERIES AVAILABLE ON REQUEST

SIZE INTERCHANGEABLE WITH M2


IAM 200/S 250/S 300/S 350/S 400/S 500/S 600/S H2

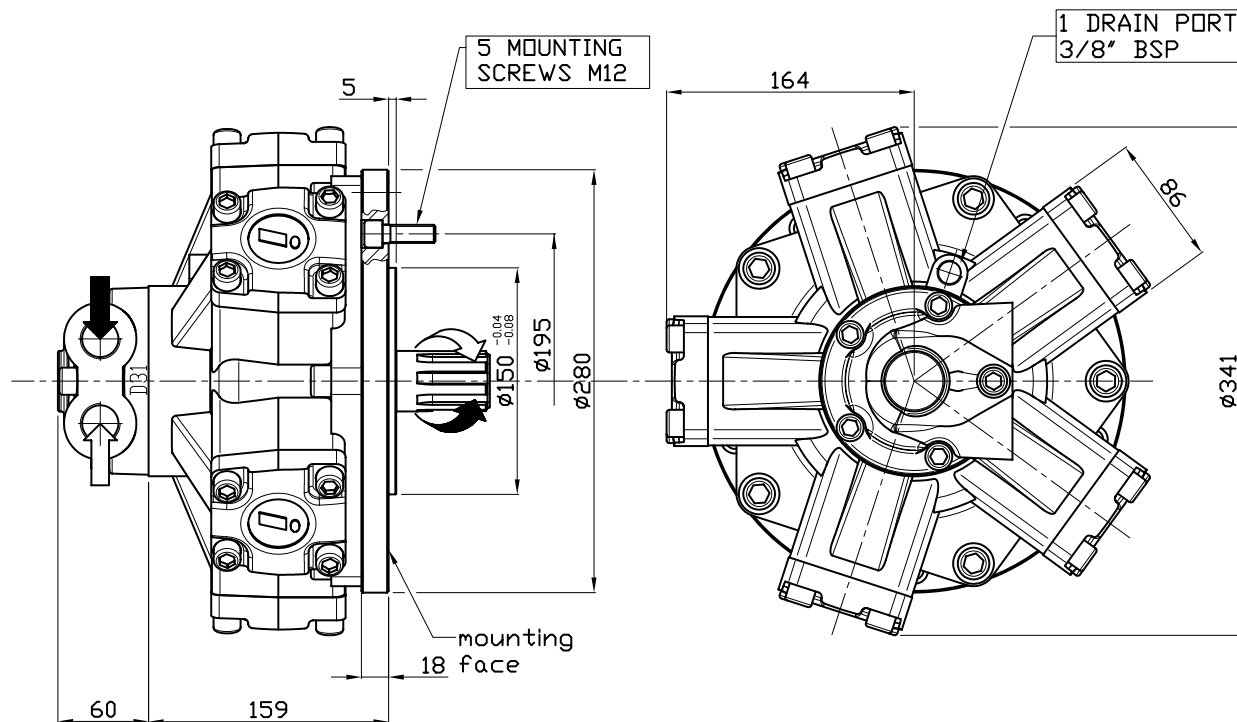


SHAFT

IAM 200/S 250/S 300/S 350/S 400/S 500/S 600/S H2


A0: Standard splined shaft

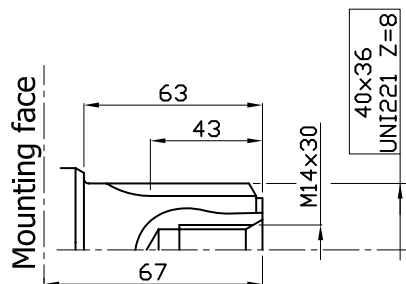

A2: Parallel shaft on request

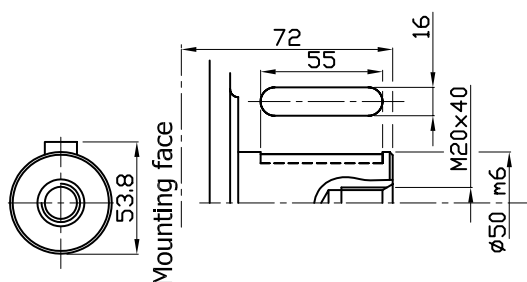

A3: Female shaft on request




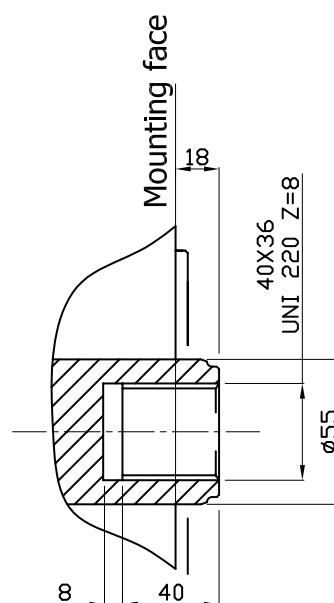


MTCP SERIES AVAILABLE ON REQUEST

ORDERING INSTRUCTIONS




	IAM	- - -	- - -	H2	A -	D - -	- - -	SB -
Motor model	↑							
IAM								
Displacement		↑						
Interchangeability			↑					
	/C	(190/C, 300/C)						
	/B10	(200/B10)						
	/PH							
	/GM2	/S						
Housing				↑				
Shaft					↑			
	A0	standard splined shaft						
	A1	special splined shaft						
	A2	parallel keyed shaft						
	A3	special female shaft						
	A..	other shaft						
Distributor								
	D31	(3/4" BSP)						
	D310	(1" BSP)	BSP THREAD					
	D40	(1" BSP)	CONFIGURATIONS					
	D47	SAE CONFIGURATIONS						
Tachometer								
	TA							
	TB							
	EST							
	EST.30							
	J	TACHOMETER PREDISPOSITION						
Spline billet								
	SB2	32x38 UNI 221						
	SB3	36x42 UNI 221						
	SB15	42x48 UNI 222						

EXAMPLE: IAM.200.H2.A0.D40
IAM.190/C.H2.A0.D47.J
IAM.200/B10.H2.A0.D31.TA

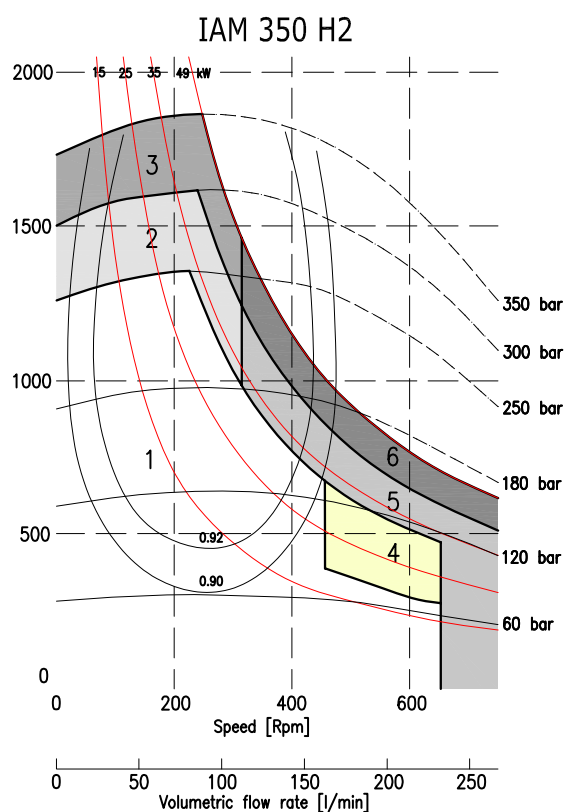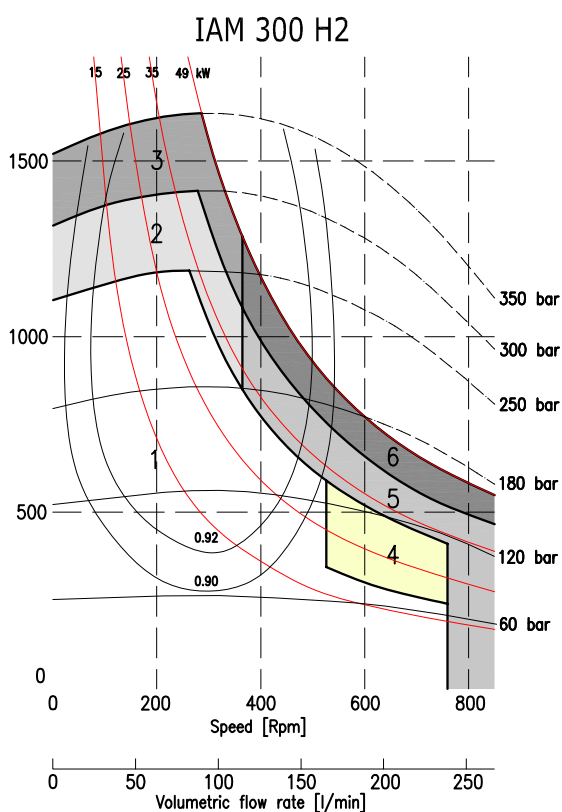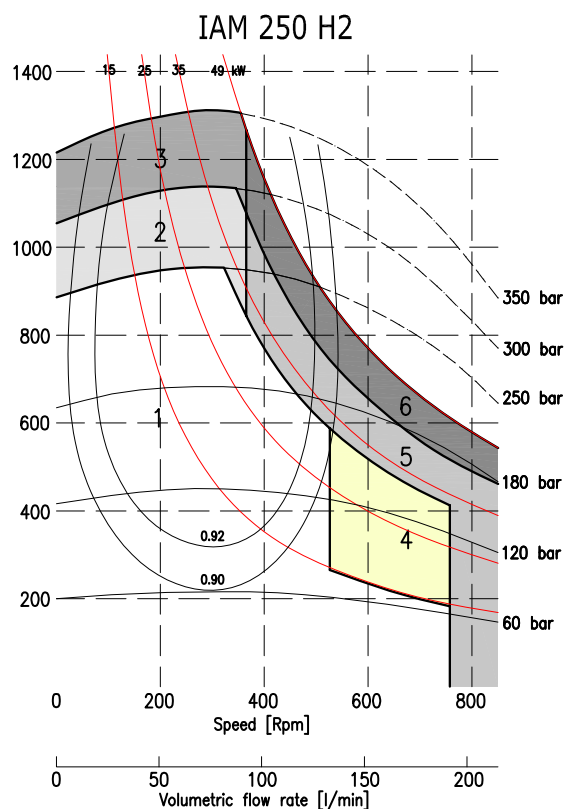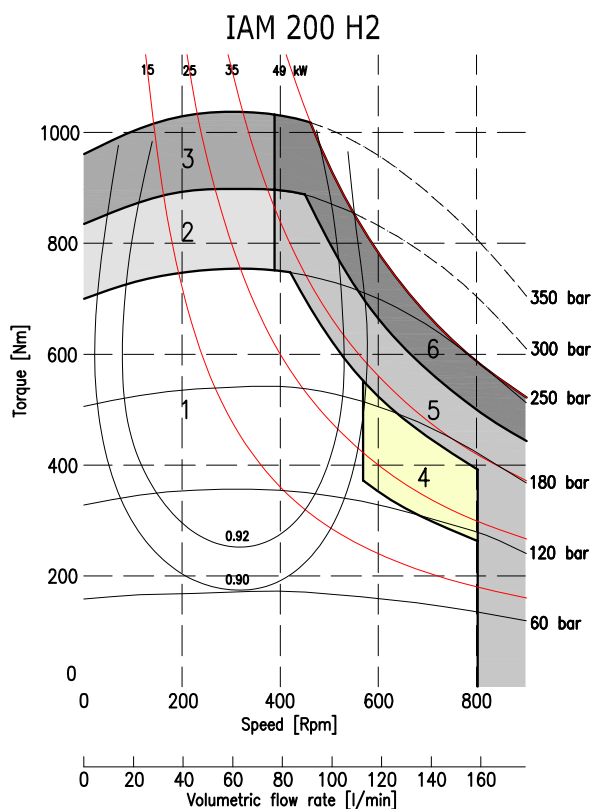

1	Continuous operation
2	Intermittent operation for period 3-5 minutes every 10-15 minutes
3	Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

4	Continuous operation with flushing
5	Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing
6	Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing

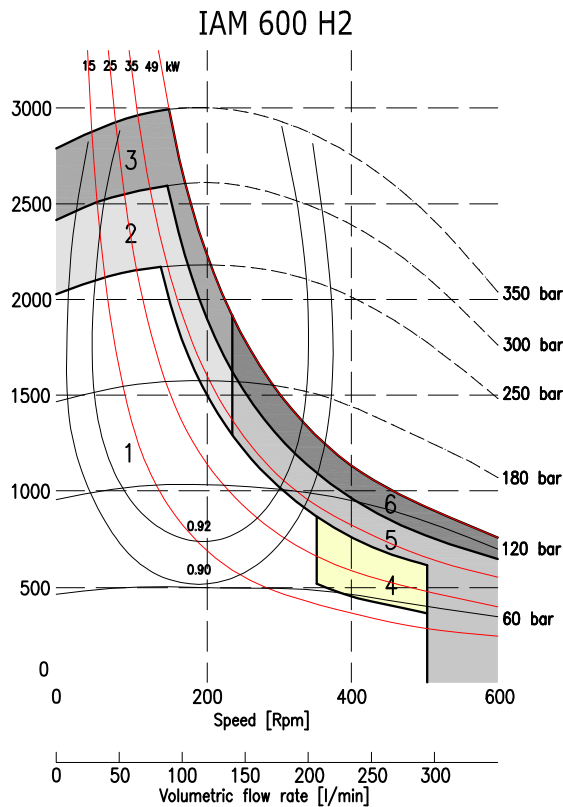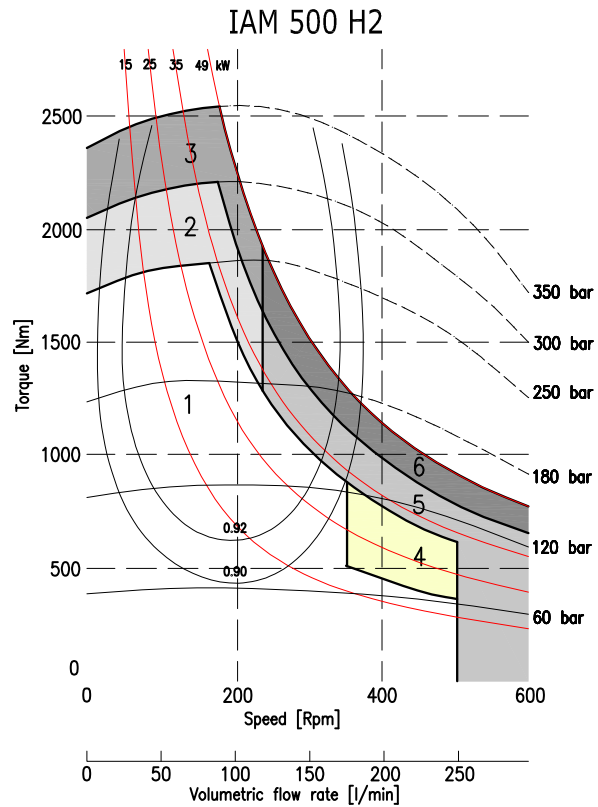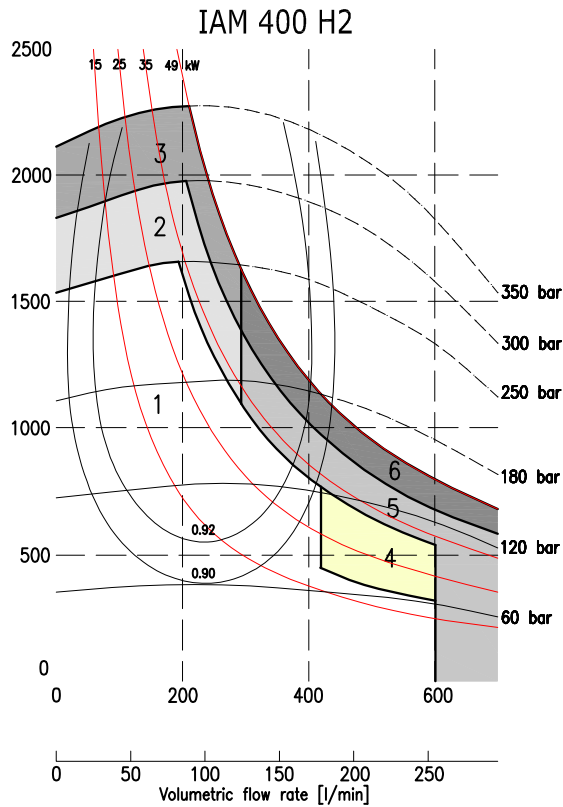

1	Continuous operation
2	Intermittent operation for period 3-5 minutes every 10-15 minutes
3	Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

4	Continuous operation with flushing
5	Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing
6	Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing